



Water Heating and Space Heating/Cooling Product Application Guide

15 December 2022

An appropriate citation for this paper is:

Essential Services Commission 2022, Water Heating and Space Heating/Cooling Product Application Guide: 15 December

Copyright notice

© Essential Services Commission, 2022



This work, Water Heating and Space Heating/Cooling Product Application Guide, is licensed under a Creative Commons Attribution 4.0 licence [creativecommons.org/licenses/by/4.0]. You are free to re-use the work under that licence, on the condition that you credit the Essential Services Commission as author, indicate if changes were made and comply with the other licence terms.

The licence does not apply to any brand logo, images or photographs within the publication.

Contents

Introd	ction	4
Abo	t this guide	4
Wh	should use this guide	5
	ing assistance	5
Re	ed legislation	6
1.	Product requirements	7
1.1	Product criteria and documentation	7
1.2	Greenhouse and Energy Minimum Standards (GEMS) -listed products	7
2.	Water heating product performance and documentation requirements	(Victoria
and N	v South Wales)	9
2.1	Gas water heaters (VEU product categories 1A and 1B)	9
2.2	Solar and heat pump water heaters (VEU product categories 1C, 1D, 1F, an and ESS activity definitions D17, D18, D19, D20, and D21)	nd 3B 10
	2.1 Supporting evidence and file naming conventions - solar and heat p	oump
,	ater heaters	12
	2.2 Modelling requirements in accordance with AS/NZS4234	17
:	2.3 Submitting residential solar hot water and heat pump product applied	cations
t	VEU and the ESS programs	17
3.2	Ducted air to air heat pump (VEU product category 7)	19
3.3	Gas or LPG space heater (VEU product category 9)	20
3.4	Room air to air heat pump (VEU product category 10)	20
3.5	Ducted evaporative cooler replacing a refrigerative air conditioner (VEU pro-	
	category 23)	21
3.6	Gas heating ductwork (VEU product category 28)	22
	ix A: Annual Solar Energy Calculation Method for Domestic Solar and I	
-	Vater Heaters	24
	SYS	24
-	nodel parameters	24
	ting regime	24
	f-peak boosting	25
	f-peak electric boost availability times	25
	f- peak electric boost systems with one element	25
	ontinuous boosting	25
	ble thermostats	25
	winter load delivery	25
•	ial considerations for air-source heat pump storage water heaters entation of results	26 26
-		
	ix B: User over-ride of time-limited boosting and one-shot boosting	28
Aut	natic resetting controls off-peak boosting	28

Contents

Permanent user over-ride controls off-peak boosting	28
Appendix C: AS/NZS 5125 reporting requirements	29
Glossary	30

Introduction

This guide provides product applicants with guidance on how to apply for water heating and space heating/cooling products so that they are eligible to be installed and create Victorian energy efficiency certificates (VEECs) under the Victorian Energy Upgrades (VEU) program in Victoria and/or Energy savings certificates (ESCs) under the Energy Savings Scheme (ESS) in New South Wales.

About this guide

This guide provides instructions on how to apply for approval of the following products:

- Water heating products (Victoria and New South Wales):
 - Gas or LPG storage water heater (VEU product category 1A)
 - Gas or LPG instantaneous water heater (VEU product category 1B)
 - Electric boosted solar water heater (VEU product category 1C, ESS activity definitions D18 and D20)
 - Heat pump water heater (VEU product category 1D, ESS activity definitions D17 and D19)
 - Gas or LPG boosted solar water heater (VEU product categories 1F and 3B, and ESS activity definition D21)
- Space heating/cooling products (Victoria only):
 - High-efficiency ducted gas heater (VEU product category 5A)
 - Ducted air to air heat pump (VEU product category 7A)
 - Gas or LPG space heater (VEU product category 9A)
 - Space air to air heat pump (VEU product category 10A)
 - Ducted evaporative cooler (VEU product category 23A)
 - Gas heating ductwork (VEU product category 28)

Products approved for use under the VEU program in Victoria will be listed on the commission's <u>Register of Products.</u>

Water heating products approved for use under the ESS in New South Wales will be listed on IPART's List of Accepted Products

This guide is divided into the following sections:

- The introduction
- <u>Section 1</u> provides general information on product applications.
- <u>Section 2</u> provides further detail of the performance criteria and documentary evidence required for water heating products.
- <u>Section 3</u> provides further detail of the performance criteria and documentary evidence required for space heating/cooling products.

You should also read the commission's <u>Application Guide for Product Applicants</u>, which provides additional information on:

- The application and assessment process, including things to bear in mind throughout the process
- Some product application functionality
- The commission's Register of Products

Who should use this guide

You should use this guide if you are:

- applying for water heating products to be approved for installation under the VEU program (Victoria) and/or ESS (New South Wales)
- applying for space heating and/or cooling products to be approved and/or listed on our Register of Products under the VEU program (Victoria)
- interested in understanding the product application requirements for water heating and space heating/cooling products under the VEU program and/or ESS.

You must hold a VEU account to apply for product approval/listing for the above products. Find out more about creating a VEU account at www.esc.vic.gov.au/become-veu-accredited.

Seeking assistance

If you have questions about your application that are not covered inthis guide, please contact us on telephone number (03) 9032 1310 or by email to <u>veu@esc.vic.gov.au</u>

If you have submitted a product application, please use the 'notes' field in the online product assessment tool to liaise directly with the product officer responsible for assessing your application.

If you have a question relating to specific product requirements under the ESS legislation, contact IPART on telephone number (02) 9290 8452 or by email to ESS@ipart.nsw.gov.au.

Related legislation

We have prepared this guide as a general summary of relevant parts of:

- the Victorian Energy Efficiency Target Act 2007 (the VEET Act)
- the Victorian Energy Efficiency Target Regulations 2018 (the VEET Regulations)
- the Victorian Energy Upgrades Specifications 2018 (the VEU Specifications)
- the Victorian Energy Efficiency Target Guidelines (the VEET Guidelines)
- the New South Wales Energy Savings Scheme Rule of 2009 (ESS Rule)

View the Victorian legislative documents at <u>www.esc.vic.gov.au/veu-legislation.</u>

View the ESS Rule at <u>www.ess.nsw.gov.au/Home/About-ESS/Legislation-ESS-Performance/ESS-</u> <u>Rule.</u>

This guide should not be relied upon as substitute for legal advice and should be read in conjunction with the above source documents. In the event of inconsistency between this guide and the source documents, the content in the source documents applies.

1. Product requirements

1.1. Product criteria and documentation

Products must meet the specified requirements to be

- listed on the commission's <u>Register of Products</u> to create VEECs (for installation in Victoria)
- listed on IPART's <u>List of Accepted Products</u> and create ESCs (for installations in New South Wales)

No deviations from the listed standards will be accepted.

You must review and familiarise yourself with the product performance and documentation requirements for each type of product before testing products and submitting product applications.

If you are unable to provide sufficient evidence that a product can meet the minimum criteria, the product will not be approved.

For most of the product categories listed on the following pages, you must submit an independent third-party verification of the product performance against established safety and performance standards, such as a test report from an accredited laboratory.

Consult the relevant sections of the VEET Regulations and VEU Specifications, and/or the ESS Rule when preparing evidence for your application.

1.2. Greenhouse and Energy Minimum Standards (GEMS) -listed products

Some products listed on the Australian Greenhouse and Energy Minimum Standards (GEMS) Register can be used for VEU installation activities, even if not listed on the commission's Register of Products.

However, for practical purposes a product must be listed in the commission's Register of Products to create VEECs in our registry system. GEMS-listed products include:

- ducted air to air heat pump (product category 7A)
- room air to air heat pump (product category 10A)
- high efficiency refrigerator and freezer (product category 22A, 22B, 22C, 22D)
- televisions (product category 24A)
- high efficiency motors (product category 31A and 31B)

• refrigerated display cabinet (product category 32A)

View the GEMS Register database at reg.energyrating.gov.au/comparator/product_types/

The register is maintained by the Australian GEMS Regulator, which is also responsible for administering the GEMS Act, and monitoring and enforcing compliance with the GEMS Act.

1.2.1. Adding GEMS-listed products to the commission's Register of Products

You can apply to us to list a GEMS-listed product on our register with minimal supporting documentation.

To add a GEMS-listed product to our Register of Products¹:

- the brand and model of the product must comply with the relevant GEMS determination and be registered on the GEMS Register
- the product must meet the product criteria specified in the Victorian Energy Efficiency Target Regulations and the minimum energy efficiency requirements specified in the Victorian Energy Upgrades Specifications
- evidence of GEMS registration must be submitted in the form of a downloadable product list (Excel file) from the GEMS Register demonstrating compliance with the product criteria (accessible via <u>https://reg.energyrating.gov.au/comparator/product_types/</u>).

In some cases the data available from the GEMS Register is incomplete and in such cases these products may not be added to our register until additional data is provided. Likewise, if a product is updated or removed from the GEMS Register, that change may not be reflected in the Register of Products immediately.

Products that are removed from the GEMS Register cease to be eligible for VEU installation activities from the date of removal. If you are aware of your product being removed from the GEMS Register prior to its GEMS expiration date, please let us know immediately.

¹ Note that due to data quality issues, a product listed on the GEMS Register may not be added to our Register of Products until such times as those data quality issues are resolved by the product applicant or GEMS.

Water heating product performance and documentation requirements (Victoria and New South Wales)

Product category number	Product category	Product criteria	Documentary evidence
1A (VEU)	Gas or LPG storage water heater	Gas or liquefied petroleum gas storage water heater certified by an accredited body as achieving a minimum 5 star rating when tested and rated in accordance with AS/NZS 5263.1.2.	 Product specification sheet showing the star rating and the storage capacity (L) and one of the following: AGA certificate or listing on AGA product directory demonstrating compliance with the product criteria.
			OR
			Evidence of listing by JAS- ANZ accredited approval body
1B (VEU)	Gas/LPG instantaneous water heater	Gas or liquefied petroleum gas instantaneous water heater certified by an accredited body as achieving a minimum 5 star rating when tested and rated in accordance with AS/NZS 5263.1.2.	 Product specification sheet showing the star rating and heating capacity (L/min) and one of the following: AGA certificate or listing on AGA product directory demonstrating compliance with the product criteria.
			OR
			Evidence of listing by JAS- ANZ accredited approval body

2.1. Gas water heaters (VEU product categories 1A and 1B)

2.2. Solar and heat pump water heaters (VEU product categories 1C, 1D, 1F, and 3B and ESS activity definitions D17, D18, D19, D20, and D21)

We assess products to check whether solar and heat pump water heating products meet the minimum eligibility requirements of the:

- VEET Regulations and VEU Specifications (for products to be installed in Victoria) and/or
- the ESS Rule (for products to be installed in New South Wales).

These performance requirements are published on the commission's Register of Products and/or IPART's List of Accepted Products.

We also publish additional solar water heater performance data on the commission's Register of Products, which are not relevant to the calculation of VEECs or ESCs, but which may assist licensed plumbers and builders to identify which solar water heater products can comply with the Plumbing Regulations 2018 (Vic).

Product category number	Product	Product criteria
1C (VEU)/ D18 (ESS)/ D20 (ESS)	Electric boosted solar water heater	 Certified to AS/NZS 2712. For products to be installed in Victoria under the VEU program achieves ≥60% annual energy savings when determined in accordance with AS/NZS 4234 and the calculation method described in Appendix A, when modelled in climate zone 4. For products to be installed in New South Wales under the ESS achieves ≥60% annual energy savings when determined in accordance with AS/NZS 4234 and the calculation method described in Appendix A, when modelled in climate zone 3.
1D (VEU)/ D17 (ESS)/ D19 (ESS)	Heat pump water heater	 Certified to AS/NZS 2712 For products to be installed in Victoria under the VEU program achieves ≥60% annual energy savings determined in accordance with AS/NZS 4234 and the calculation method

	 described in Appendix A, when modelled in climate zone HP4- AU for products installed in climate zone 4² achieves ≥60% annual energy savings determined in accordance with AS/NZS 4234 and the calculation method described in Appendix A, when modelled in climate zone HP5- AU for products installed in climate zone 5² For products to be installed in New South Wales under the ESS achieves ≥60% annual energy savings determined in accordance with AS/NZS 4234 and the calculation method described in Appendix A, when modelled in climate zone HP3- AU for products installed in BCA climate zone 2,3,4,5, or 6³ achieves ≥60% annual energy savings determined in accordance with AS/NZS 4234 and the calculation method described in Appendix A, when modelled in climate zone HP3- AU for products installed in BCA climate zone 2,3,4,5, or 6³ achieves ≥60% annual energy savings determined in accordance with AS/NZS 4234 and the calculation method described in Appendix A, when modelled in climate zone HP3- AU for products installed in BCA climate zone 2,3,4,5, or 6³
1F (VEU)/ Gas or LPG 3B (VEU)/ boosted solar D21(ESS) water heater	 Certified to AS/NZS 2712 For products to be installed in Victoria under the VEU program achieves ≥60% annual energy savings when determined in accordance with AS/NZS 4234 and the calculation method described in Appendix A, when modelled in climate zone 4.
	 For products to be installed in New South Wales under the ESS achieves ≥60% annual energy savings when determined in accordance with AS/NZS 4234 and the calculation method described in Appendix A, when modelled in climate zone 3.

Note: A product does not need to achieve $\geq 60\%$ annual energy savings across all climate zones to apply for approval. However, it will only be able to claim certificates for installations in climate zones where it has met the $\geq 60\%$ annual energy savings threshold.

² Climate zones for a Victorian postcode to be determined in accordance the Location Variable List table in the VEU Specifications 2018

³ Refer to the <u>Australian Building Codes Board Climate Zone Map</u> to identify the relevant BCA climate zones.

2.2.1 Supporting evidence and file naming conventions - solar and heat pump water heaters

You will need to complete and submit the following forms as part of your product application via the VEU registry (available for download at <u>www.esc.vic.gov.au/veu-product-applicants)</u>:

- Electric boosted solar water heater product application form to apply for approval of electric boosted solar water heater.
- Gas or LPG boosted solar water heater product application form to apply for approval of gas or LPG boosted solar water heater products.
- Heat pump water heater product application form to apply for approval of heat pump water heater products.

All supporting documents must specify the product brand and model number. All brands and models must reconcile precisely with the brands and the models on the supporting documents. The proposed products, components, brands, and models must reconcile with the brand and the models shown on the supporting documents.

All test reports must be produced by National Association of Testing Authorities (NATA) accredited (or equivalent) test laboratories. Australian manufacturers can test their products in their own inhouse NATA accredited laboratories.

If supporting documents contain different brands and/or model numbers, the applicant must submit a manufacturer's declaration clearly reconciling the different product brands and/or model numbers used across supporting documents with the brands and model numbers proposed under the schedule.

Any supporting document with unexplained model variations will not be accepted.

We will accept a representative test report⁴ for tanks and collectors if the differences between the tested product and the products represented by the report are unlikely to affect the performance of the products. The applicant must include a manufacturer's declaration that includes a comparison of product specifications between the tested model and the model applied in the application. The comparison should cover detailed information about the specifications listed below and any other specifications which might affect the performance of the components referred to in the declaration.

⁴ Test reports should be less than 10 years old from the date of product application.

Note: You do not need to submit modelling outputs for all climate zones for a product when applying for approval.

Product specifications for tanks:

- The insulation material and thickness
- The tank dimensions
- The water container material and wall thickness
- The position of fittings (element, thermostat, and openings for water in and out)

Product specifications for collectors:

- The glass type (specify thickness, transmissivity, and surface treatment)
- The absorber surface, material, and design
- The collector insulation material and thickness
- Collector dimensions

We will use this information to determine whether a representative test report is acceptable. We will accept a product test report if product specifications remain the same since the test.

Product Category	Requirement	Documentary evidence	Naming convention and upload format
Electric boosted solar 1C (VEU)/ D18 (ESS)/ D20 (ESS) Heat pump water heater 1D (VEU)/ D17 (ESS)/ D19 (ESS) Gas / LPG boosted solar 1F(VEU)/	Solar water heater application form Heat pump water heater application form	You can apply for up to three products under the one application form. Please provide one completed application form listing specifications for each model being applied for as part of the current application.	More than one product can be included in the Excel form, so the name needs to include the date and brand(s): BrandName_YYYYMMDD_commission.xl s. e.g. for a solar water heater from Brand ABC provided on 2 March 2022 the filename would be ABC_20220302_ESC.xls
3B(VEU)/ D21(ESS)	TRNSYS model	TRNSYS model for the product, including decks and all input and output files.	Input (deck), output, and list files and, if appropriate, file describing incident angle modifier. Brandname_model number_ESC.lst, Brandname_model number_ESC.DCK, Brandname_model number_ESC.out and

Applicants must apply the naming conventions shown in the following table.

		if appropriate Brandname_ModelNumber_IAM.txt
TRNSYS modelling reports (If available)	AS/NZS 4234:2008 (Victoria and NSW) or AS/NZS 4234:2021(NSW only) reports produced by modelers that include simulations as specified by the commission (including the appropriate tables from Appendix C, AS/NZS 4234). The Australian standard AS/NZS 4234 was updated recently. The new version is AS/NZS 4234 -2021. The ESS program prefers to establish product performance according to the AS/NZS 4234-2021. Currently, ESS will accept products meeting either 2008 or 2021 versions of the Standard. The VEU program will only accept products tested to AS/NZS 4234-2008. When submitting applications, please select the correct version of the standard from the drop-down selection of the portal.	PDF document
Accreditation	AS/NZS 2712	PDF document
certificate		Brandname_ModelNo_2712.pdf

	Thermal performance of solar collector	Test report: AS/NZS 2535.1 or equivalent (only required for systems incorporating a solar collector).	PDF document Brandname_CollectorModelNo_2535.pdf
	Thermal performance of heat pump (COP and power correlations)	Test report: AS/NZS 5125.1 (only required for systems incorporating heat pumps).	PDF document Brandname_HeatPumpModelNo_5125.pdf
		The test report shall require all the reporting requirements specified in the standard.	
		See Appendix C of this document for additional clarification.	
	Thermal performance of all tanks including electric heated tanks	Test report: AS/NZS 4692 or equivalent. AS/NZS 1056.1 was superseded on 19 March 2021. This standard will no longer be accepted from that date.	PDF document Brandname_TankModelNo_4692.pdf
	Test report for all storage and in-line gas heaters	Test report: AS 4552 or equivalent Including as appropriate; start up capacity, maintenance rate, burner capacity and efficiency.	PDF document Brandname_ModelNo_4552.pdf
	Pump specifications	Test report: AS/NZS 4234 including test report for measured flow rate and power measured flow rate in standard configuration. For variable flow systems include a	PDF document PumpBrandname_PumpModelNo.pdf

	description of the flow rate control algorithm.	
Controller specifications	Description of the thermostat controller algorithm and the pump control set points or algorithm. Must include legionella control method.	PDF document ControllerBrandname_ControllerModelNo. pdf
No load system operation test result	AS/NZS 2712:2007 No load system operation test report for the system or family of systems applied for (solar systems only).	PDF document Brandname_NoLoadModelNo_2712.pdf
Schematic of the system and bill of materials	Parts list including insulation included or specified for piping etc. schematic diagram including all relevant control valves and flow meter if appropriate, solar or heat pump flow and return pipes and temperature sensor location/s.	PDF document Brandname_ModelNo_schematic.pdf
Dimensioned diagram of the tank	Dimensioned inner tank drawing including cold inlet and hot outlet positions, element position (if fitted), flow and return positions for auxiliary heater (if appropriate), solar or heat pump flow and return ports and temperature sensor location/s.	PDF document Brandname_TankModelNo_dimension.pdf
Photograph of relevant data plate(s)	Photo of the product data plate for integrated heat pumps.	PDF document Brandname_TankModelNo_DataPlates.p df

For split or separate
heat pumps photo of
the tank data plate
and heat pump unit
data plate.

2.2.2 Modelling requirements in accordance with AS/NZS4234

The Australian standard AS/NZS 4234 was updated in June 2021. You can submit applications for products modelled in accordance with AS/NZS 4234:2008 (for the VEU or ESS programs) or AS/NZS 4234:2021(for the ESS program only).

When submitting applications, please select the correct version of the standard from the drop-down selection of the portal.

Victoria

Subject to meeting requirements, where an application includes a product modelled in accordance with:

• AS/NZS 4234:2008, we will publish product performance parameters for that product.

New South Wales

Subject to meeting requirements, where an application includes a product modelled in accordance with:

- both AS/NZS4234:2021 and AS/NZS4234:2008, IPART will only publish the AS/NZS4234:2021 parameters for that product.
- AS/NZS4234:2021 for a product previously accepted with AS/NZS4234:2008 parameters, IPART will publish AS/NZS4234:2021 parameters and end-date the AS/NZS4234:2008 parameters.

2.2.3 Submitting residential solar hot water and heat pump product applications to VEU and the ESS programs

The product applicants can submit product applications for the VEU (Victoria), ESS program (NSW) or both. When you apply, please select the relevant state from the options below.

- VIC only applications for the Victorian VEU program
- NSW Only applications for the ESS program in New South Wales

• VIC and NSW combined - applications aimed at both VEU and ESS programs.

In addition to selecting the state, you must select the correct Victorian and/or NSW Peak Loads.

Also note that you are now able to propose a product for one or more zones.

When submitting product applications, applicants can upload one product at a time or use the new bulk upload function. Usually, there is a limit of three products per application. Under special circumstances, we allow upload of up to eight products per application. When uploading more than three products, please ensure that the following criteria are met.

- 1. One component (i.e., the tank, solar collector, or heat pump) is shared across a family of products within the application.
- 2. Each product listed in the application has a single technology (i.e. pumped inline boost, thermosiphon, integrated HP, non-integrated HP etc.).
- 3. One AS 2712 certificate covers all products in the application.
- 4. The total number of test reports supporting the products does not exceed ten.

When using the bulk upload function, the applicant can download the upload form using the function 'Generate product upload form'. Once form is populated with product information, you can upload the form using the 'upload products' function.

3. Space heating/cooling product performance and documentation requirements (Victoria only)

3.1. High efficiency ducted gas (VEU product category 5)

Product criteria	Documentary evidence
 A product that: is certified by an accredited body to achieve a minimum 5star rating when tested and rated in accordance with AS/NZS 5263.1.6 has a minimum thermal output (or capacity) of 10 kW as determined in accordance with AS/NZS 5263.1.6 	Evidence of certification demonstrating compliance against the product criteria: screen shot of listing on the Gas Technical Regulators Committee database (http://equipment.gtrc.gov.au) indicating a status of 'Certified'. OR Evidence of product registration on the AGA product directory

3.2. Ducted air to air heat pump (VEU product category 7)

Product criteria	Documentary evidence
 A product that: complies with the GEMS (Air Conditioners	Evidence of GEMS registration
and Heat Pumps) Determination 2013 (Cth) has a minimum RTHC of 10kW at the H1	downloadable product list (Excel file) from
temperature condition has a minimum ACOP of: 3.9, if the RTHC is 18kW or less	GEMS (www.energyrating.gov.au).

- 3.7 in any other case.

3.3. Gas or LPG space heater (VEU product category 9)

Product criteria	Documentary evidence
 A product that: is certified by an accredited body to achieve a minimum 4- star rating when tested and rated in accordance with AS/NZS 5263.1.3 has a minimum thermal output (or capacity) of 2 kW as determined in accordance with AS/NZS 5263.1.3 	Evidence of certification demonstrating compliance against the product criteria: screen shot of listing on the Gas Technical Regulators Committee database (http://equipment.gtrc.gov.au) indicating a status of 'Certified'. OR Evidence of product registration on the AGA product directory.
 has a room sealed flue 	Product specification sheet

3.4. Room air to air heat pump (VEU product category 10)

Product criteria	Documentary evidence
 A product that: complies with the GEMS (Air Conditioners and Heat Pumps) Determination 2013 (Cth) achieves minimum RTHC is of 2 kW at the H1 temperature condition has a minimum ACOP of: # 	Evidence of GEMS registration: downloadable product list (Excel file) from GEMS (www.energyrating.gov.au).
4.2 if the RTHC is less than 3 kW4 if the RTHC is 3kW or greater	

Note: Products with ACOP of less than 4.2 are not eligible for certificates when installed to replace either a plug-in electric heater, or wood fired room heater (activity scenario 10A(iii)); or a refrigerative air conditioner and a plug-in room heater (activity scenario 10A(v)).

3.5 Ducted evaporative cooler replacing a refrigerative air conditioner (VEU product category 23)

Product criteriaDocumentary evidenceA product that:Test report showing compliance
with AS 2913-2000.• complies with and is tested in accordance with AS 2913Test report showing compliance
with AS 2913-2000.• has a minimum 7 kW rated outputNote that the test report must
show all the performance
variables (EERFL, EER50%, and
EER20%).• has a calculated according to the formula:EER20%).

EER = 0.2 x EERFL + 0.3 x EER50% + 0.5 x EER20%

Where:

- EERFL is the nominal rating (kW) ÷ electricity consumption (kW) at rated airflow
- EER50% is the nominal rating (kW) ÷ electricity consumption (kW) at 50% rated airflow
- EER20% is the nominal rating (kW) ÷ electricity consumption (kW) at 20% rated airflow.

Product Category	Product criteria	Documentary evidence
Flexible ductwork (28A)	 Flexible ductwork that: is tested and certified by an approved laboratory as complying with AS 4254.1 and is labelled in accordance with that standard is insulated using bulk insulation that is certified by an accredited body or an approved laboratory as complying with AS/NZS 4859.1 achieves a minimum R-value of R1.5 when measured in accordance with AS/NZS 4859.1. is constructed and installed in accordance with AS 4254.1 and uses fittings that: 	Test report by a NATA accredited laboratory or equivalent body showing compliance with the product criteria.
	 if installed in a class 1 or 10 Building under Part A6 of Volume One of the BCA, achieves at least the R-value specified by Table 3.12.5.2 of Volume Two of the BCA if installed in a class 2 to 9 Building under Part A6 of Volume One of the BCA, achieves the minimum total R value specified by Specification J5.2b of Volume One of the BCA 	
Rigid ductwork (28A)	 Rigid ductwork that: is tested and certified by an approved laboratory as complying with AS 4254.2 is insulated using bulk insulation that is certified by an accredited body or 	

3.6. Gas heating ductwork (VEU product category 28)

approved laboratory as complying with AS/NZS 4859.1

- achieves a minimum R-value of R1.5 when measured in accordance with AS/NZS 4859.1
- is longitudinally labelled at intervals of no more than 1.5 meters in characters that are clearly legible and at least 18mm high and state the duct manufacturers or assembler's name, the diameter of the duct core, the R-value of the bulk insulation and whether the ductwork complies with AS 4254.2
- is constructed and installed in accordance with AS 4254.2 and uses fittings that
 - if installed in a class 1 or 10 building under Part A6 of Volume One of the BCA, achieves at least the R-value specified by Table 3.12.5.2 of Volume Two of the BCA
 - if installed in a class 2 to 9 building under Part A6 of Volume One of the BCA,, achieves the minimum total R value specified by Specification J5.2b of Volume One of the BCA

Appendix A: Annual Solar Energy Calculation Method for Domestic Solar and Heat Pump Water Heaters

TRNSYS

Modelling must be conducted in accordance with AS/NZS 4234 using the TRNSYS program or extensions of the software in the TRNSYS modelling package.

It is required to ensure that the product can deliver the selected load in the middle of winter, and to determine the annual energy savings in:

- climate zone 4 for solar water heaters in Victoria
- climate zone 3 for solar water heaters in New South Wales
- climate zone HP4-Au and/or HP5-Au for heat pumps in Victoria, and/or
- climate zones HP3-Au and/or HP5-Au for heat pumps in New South Wales.

Modelling should be carried out using a simulation time step of 0.1 hour or less.

Modelling must employ either the small or medium load size as described in AS/NZS 4234

Key model parameters

The calculation of energy consumption must use the method set out below.

```
Collector inclination = 25^{\circ}, azimuth = 0^{\circ} North (as per the "North Orientation" in AS/NZS 4234).
Note the alternative "representative average installation" collector inclination = 20^{\circ}, azimuth = 45 can also be used.
```

Weather data to be used in the simulation must be:

- climate zone 4 for solar water heaters in Victoria
- climate zone 3 for solar water heaters in New South Wales
- climate zones HP4-Au and/or HP5-Au for heat pumps in Victoria, and/or
- climate zones HP3-Au and/or HP5-Au for heat pumps in New South Wales.

Boosting regime

The boosting regime modelled must be consistent with the way the product will be installed. See Appendix B for further guidance on user override of time limited boosting.

Off-peak boosting

Most electric boosted solar water heaters installed in Victoria are boosted off peak and should be sized to minimise boosting required during peak times. The model must separately report the total energy supplied in each boost mode (peak and off peak) throughout the modelling calculation.

Off-peak electric boost availability times

For off-peak electric boost availability times, refer to the AS/NZS 4234 "night rate".

Off- peak electric boost systems with one element

Off-peak electric boost systems with one element may be set to allow the booster to be energised with a 'one shot' boost if the delivered water temperature falls below a set threshold, with the control reverting to regular operation after one boost cycle. This feature may only operate once per day.

Continuous boosting

For electric boosted solar water heaters and heat pumps that are to be installed on the more expensive continuous boosting tariff, the system should be modelled with the boost control in continuous mode. The results must note the modelling assumed a continuous tariff.

Variable thermostats

Products with variable thermostats which facilitate user override are acceptable. The commission does not specify which thermostat setting should be used in the model, provided:

- the model setting is within the range of settings available for the actual product; and
- the model achieves the following related Australian Standards requirements:
 - minimum delivery temperature of 45°C; and
 - the product must control for legionella (various options are available).

Mid- winter load delivery

The system must report the minimum delivery temperature under the selected load as specified in AS/NZS 4234. The purpose of this requirement is to ensure the consumer has sufficient hot water through periods of low solar gain.

The modelling procedure allows for one-shot boosting where installations connected to off-peak supply will enable this to occur as outlined in the Boosting Regime section above. If the product

fails to meet this condition, a lower load should be selected. If the product fails to meet this condition under the small load, the product is not eligible.

Solar water heater products must be capable of mid-winter load delivery and its performance must be evaluated for:

- climate zone 3 if they are to be installed in New South Wales
- climate zone 4 if they are to be installed in Victoria.

Special considerations for air-source heat pump storage water heaters

The heat pump water heater performance for products to be installed in Victoria must be evaluated for climate zones HP4-Au and/or HP5-Au. Products must achieve:

- 60% annual energy savings in climate zone HP4-Au to be installed in climate zone 4
- 60% annual energy savings in climate zone HP5-Au to be installed in climate zone 5. Note zone HP5-Au corresponds to Australian Building Code zones 7 and 8.

Refer to the Location Variable List table in the VEU Specifications for the climate zones of Victorian postcodes.

The heat pump water heater performance for products to be installed in New South Wales must be evaluated for climate zones HP3-Au and/or HP5-Au. Products must achieve:

- 60% annual energy savings in climate zone HP3-Au to be installed in BCA climate zone 2,3,4,5, or 6
- 60% annual energy savings in climate zone HP5-Au to be installed in BCA climate zone 7 or 8.

Refer to Table A26 of the ESS Rule for the BCA climate zones for New South Wales postcodes.

Presentation of results

The performance results of the water heating products must be presented in the current version of the forms below, available at <u>www.esc.vic.gov.au/veu-product-applicants:</u>

- Electric boosted solar water heater product application form for electric boosted solar water heater.
- Gas or LPG boosted solar water heater product application form for gas or LPG boosted solar water heater products.
- Heat pump water heater product application form for heat pump water heater products.

A separate row must be used for each system. Please enter only the required data marked by light blue cells. Do not modify formulas or hidden data.

Annual purchased energy consumption data should be entered with a precision of four significant figures. The result of "annual purchased energy savings (%)" is published with a precision of two significant figures.

Appendix B: User over-ride of time-limited boosting and one-shot boosting

The concept of time limited boosting used in off-peak electric water heaters has been adopted for some solar/gas-storage water heaters. The purpose of using time-limited boosting in solar/gas storage water heaters is to separate the solar and gas energy inputs in time so that the solar input can occur over the day without the gas boost operating and diminishing the solar performance. Schemes that have adopted to maximise the solar performance of solar/gas storage water heater include:

- time clock limit of gas operation
- intelligent controller that senses solar availability, the quantity of hot water in the tank, and minimises gas operation during solar input periods.

Systems using this type of control scheme can be configured to achieve reasonable solar contribution. However, if the time clock or controller settings are adjustable by the user, there may be a significant reduction of solar contribution. User adjustment of the boost control could occur during periods of bad weather, or when there is a short-term high demand.

Automatic resetting controls off-peak boosting

The current methodology accounts for the potential user adjustment of the auxiliary boosting by requiring the controls automatically reset to the conditions used for the rating analysis within 24 hours of any user adjustment of the controller.

Both gas and electric products that allow user override of an auxiliary booster control that automatically resets within 24 hours should be modelled using a 'one-shot' boosting option that is initiated when the delivery temperature drops to a level where the product would fail the minimum delivery temperature requirement. This feature may only operate once per day. The one-shot threshold temperature should be 45°C or higher depending on the product design.

Permanent user over-ride controls off-peak boosting

Products which allow the user to reset the boost controller and do not automatically reset to the operating conditions used during the rating calculation should be modelled with the boost control in continuous mode.


Appendix C: AS/NZS 5125 reporting requirements

When testing heat pump water heaters, Appendix F of AS/NZS 5125 specifies the minimum data reporting required in the test report.

Please note:

Clause F6.2 of AS/NZS 5125 requires graphs of measured values(test) against the values established through regression analysis are included in the report.

Examples are shown below.

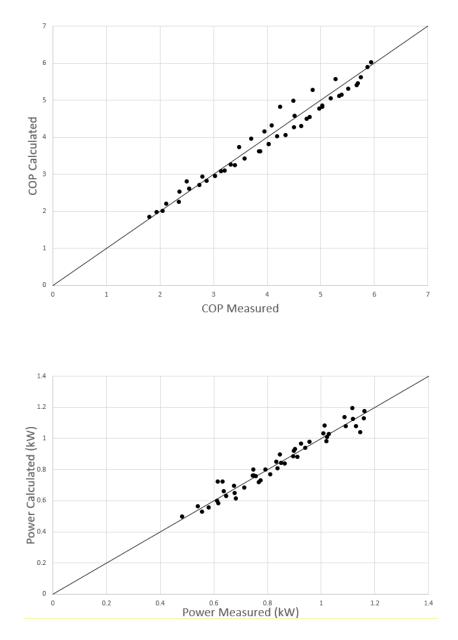

Essential Services Commission Water Heating and Space Heating/Cooling Product Application Guide

Glossary

Term	Definition
Accredited body	In relation to a product, this means a body accredited under the Joint Accreditation System of Australia and New Zealand to give product certification or component certification of a product.
ACOP	Annual coefficient of performance is the ratio of a product's rated heating capacity to its effective power input at its rated heating capacity.
AGA	Australian Gas Association
AGA product directory	The AGA publishes a Directory of all type tested products that are currently certified by AGA. Available at: https://www.aga.asn.au/product_directory
BCA	Building Code of Australia, forming part of the National Construction Code.
commission	Essential Services Commission
ESS Rule	Energy Savings Scheme Rule of 2009
ESC	Energy savings certificate under the New South Wales' Energy Savings Scheme
ESS	Energy Savings Scheme (in New South Wales)
ESV	Energy Safe Victoria

Term	Definition
GEMS	Greenhouse and Energy Minimum Standards
GEMS Act	Greenhouse and Energy Minimum Standards Act 2012 (Cth)
GEMS Register	Means the register kept by the Greenhouse and Energy Minimum Standards Regulator under the GEMS Act and made available to the public at <u>http://reg.energyrating.gov.au/comparator/</u>
NATA	National Association of Testing Authorities
residential premises	A building classified under part A3 of the Building Code of Australia as a class 1, 2, 3, or 4 building.
RTHC	Rated total heating capacity
VEEC	Victorian energy efficiency certificate. Each VEEC represents one tonne of carbon dioxide equivalent (CO ₂ -e) abated by the prescribed activity.
VEET Act	Victorian Energy Efficiency Target Act 2007
VEET Regulations	The Victorian Energy Efficiency Target Regulations 2018
VEU program	Victorian Energy Upgrades program
VEU Specifications	Specifications published by the Secretary under regulation 35 of the VEET Regulations

Document version control

The RM reference for this document is: C/18/24089

Version	Amendments made	Date published
1.0	First release	10 December 2018
2.0	 Inclusion of new reporting requirements for performance of heat pump products in climate zone HP5-Au as defined in the 2018 VEU Specifications. Update on requirements regarding brand/model reconciliation. Incorporation of the former "Annual Solar Energy Calculation Method for Domestic Solar and Heat Pump Water Heater" into Appendix A and Appendix B (with minor amendments for clarification). Removal of maximum threshold for peak (day rate) boost energy for off-peak electric boost systems. 	10 June 2019
2.1	 Update to: the gas storage (activity 1A) water heater and instantaneous water heater (activity 1B) product requirements guidance on supporting evidence for heat pump and solar hot water systems to guidance on supporting evidence for space heaters and ducted gas heaters. 	11 March 2020
2.1	Update to section 1.2 and included missing GEMS product categories	23 April 2021
2.2	Update to section 2.2 to include further guidance on using test reports and representative tests	13 August 2021

Version	Amendments made	Date published
2.3	Update to section 3.4 to clarify that product with ACOP of less than 4.2 is not eligible for use under activity scenarios 10A(iii) and (v)	11 November 2021
2.4	Update to integrate water heating product applications with NSW's Energy saving scheme	1 April 2022
2.5	Clarified that VEU program will accept only solar and heat pump water heating products approved under the AS/NZS 4234 -2008.	22 April 2022
2.6	Clarified the process for adding GEMS-listed products to the commission's Register of Products'. Introduced updates to product application process for solar or heat pump hot water products.	06 September 2022
2.7	Minor update to gas heating ductwork product criteria to align with VEU Specifications – 13.0	19 September 2022
2.8	Provided further clarification on accreditation of laboratories. All test reports must be produced by NATA accredited (or equivalent) test laboratories. Australian manufacturers can test their products in their own inhouse NATA accredited laboratories. Updated section 2.2.1 to clarify requirements for AS/NZS 5125 test reports. Added Appendix C to demonstrate those requirements.	15 December 2022